



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

AMJG0808-0300-BKB-26 MODULAR CABLE

CHANGE NOTIFICATION:	PCN 20220425_AMJG0808-0300-BKB-26
DESCRIPTION OF CHANGES:	CHANGE OF DATA SHEET CHANGE OF DATA SHEET New Draw.-No. ASS_7947_CArev02
REASON FOR CHANGE:	CHANGE OF PRODUCT LOCATION CHANGE OF PRODUCT LOCATION
KEY CHARACTERISTICS OF CHANGE:	Details see page 3
PRODUCTS AFFECTED:	AMJG0808-0300-BKB-26
DATE OF CHANGE AND IMPLEMENTATION:	CHANGE: WEEK 18 / YEAR 2022 IMPLEMENTATION: 25/4/2022
RESPONSE:	NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

AMJG0808-0300-BKB-26

OLD VERSION

AMJG0808-0300-BKB-26

NEW VERSION

Apprearence

CN1

BOM

③	Molding	PVC 45P Color: see order code	NA	KG
②	CONNECTOR	RJ45 8P8C two fork 3u" gold plated with metal shield	2	PCS
①	CABLE	CAT5e FTP (26AWG*1PR)*4+D+A+PVC OD=5,2±0,3MM Color: see order code	NA	MM
NO:	NAME	DESCRIPTION	Q'TY	UNIT

Apprearence

CN1

BOM

④	AL-Foil	Double-sided conductive aluminum foil ②	2	PCS
③	Molding	PVC 65P Color: see order code ②	NA	KG
②	CONNECTOR	RJ45 8P8C two fork 3u" gold plated with metal shield	2	PCS
①	CABLE	CAT5e F/UTP (26AWG*1PR)*4+D(AM)+A+PVC OD=5,2±0,3MM Color: see order code ②	NA	MM
NO:	NAME	DESCRIPTION	Q'TY	UNIT

FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-025/G MODULAR CABLE

CHANGE NOTIFICATION:

PCN 20220425_DK-1611-025/G

DESCRIPTION OF CHANGES:

CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7510_CArev01

REASON FOR CHANGE:

CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE:

Details see page 3

PRODUCTS AFFECTED:

DK-1611-025/G

DATE OF CHANGE AND IMPLEMENTATION:

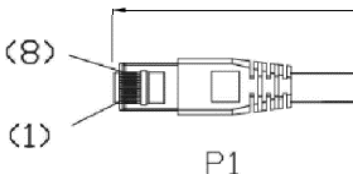
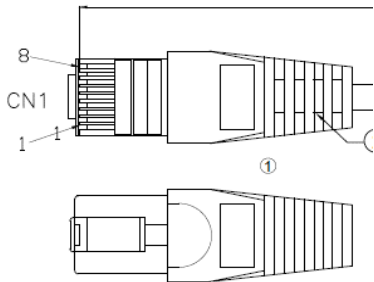
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE:

NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-025/G	OLD VERSION	DK-1611-025/G	NEW VERSION																				
Apprearence	 P1	Apprearence																					
BOM	Material: - Conductor: 24AWG 7*0.19±0.015mm - Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown - Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL) - Wiring T568B Color - P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2	BOM	<table><tr><td>①</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>①</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>①</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	①		Molding PVC	2	Molding PVC 65P	①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	①		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
①		Molding PVC	2	Molding PVC 65P																			
①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
①		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

PCN REVISION HISTORY:

DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

page 3/



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-010/BL MODULAR CABLE

CHANGE NOTIFICATION:

PCN 20220425_DK-1611-010/BL

DESCRIPTION OF CHANGES:

CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7510_CArev01

REASON FOR CHANGE:

CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE:

Details see page 3

PRODUCTS AFFECTED:

DK-1611-010/BL

DATE OF CHANGE AND IMPLEMENTATION:

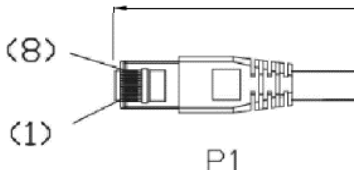
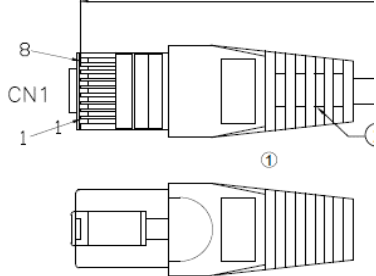
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE:

NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-010/BL	OLD VERSION	DK-1611-010/BL	NEW VERSION																				
Apprearence	 P1	Apprearence																					
BOM	Material: - Conductor: 24AWG 7*0.19±0.015mm - Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown - Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL) - Wiring T568B Color - P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2	BOM	<table><tr><td>①</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>①</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>①</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	①		Molding PVC	2	Molding PVC 65P	①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	①		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
①		Molding PVC	2	Molding PVC 65P																			
①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
①		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

PCN REVISION HISTORY:

DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

page 3/



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-005/G MODULAR CABLE

CHANGE NOTIFICATION:

PCN 20220425_DK-1511-005/G

DESCRIPTION OF CHANGES:

CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7160_CArev04

REASON FOR CHANGE:

CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE:

Details see page 3

PRODUCTS AFFECTED:

DK-1511-005/G

DATE OF CHANGE AND IMPLEMENTATION:

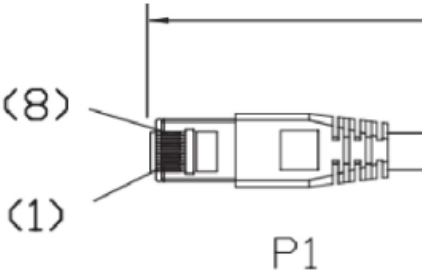
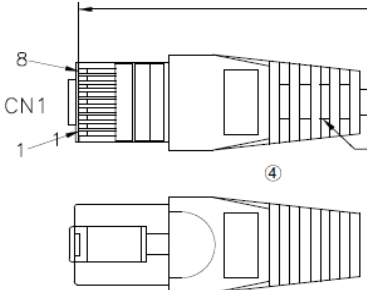
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE:

NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-005/G	OLD VERSION	DK-1511-005/G	NEW VERSION																				
Apprearence		Apprearence																					
BOM	SPECIFICATIONS: 1. CONDUCTOR: 1.1 CONDUCTORS: 24AWG 7*0.19 ± 0.015mm 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN. 2. CABLE JACKET 2.1 PRINTING ON THE JACKET: CM (UL) C(UL) 4P 24AWG UTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3. CABLE ASSEMBLY 3.1 SEE SECTION A-A FOR DIMENSIONS 3.2 CABLE TIE: WHITE TIE 3.3 WIRING: T568B COLOR 3.4 CONTACT PLUG: RJ45 8P8C 3u pc UL 94V-2 4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST	BOM	<table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
④		Molding PVC	2	Molding PVC 65P																			
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

	1	2	3	4	5	6	7																																																																										
A									A																																																																								
B									B																																																																								
C	Order code: DK-1511-XXX/XX color: BL(black),WH(white),B(blue),G(grey) Length: see table ①								C																																																																								
D	PIN OUT <table><tr><th>CN1</th><th>WIRE COLOR</th><th>CN2</th></tr><tr><td>1</td><td>ORANGE/WHITE</td><td>1</td></tr><tr><td>2</td><td>ORANGE</td><td>2</td></tr><tr><td>3</td><td>GREEN/WHITE</td><td>3</td></tr><tr><td>6</td><td>GREEN</td><td>6</td></tr><tr><td>4</td><td>BLUE</td><td>4</td></tr><tr><td>5</td><td>BLUE/WHITE</td><td>5</td></tr><tr><td>7</td><td>BROWN/WHITE</td><td>7</td></tr><tr><td>8</td><td>BROWN</td><td>8</td></tr></table>								CN1	WIRE COLOR	CN2	1	ORANGE/WHITE	1	2	ORANGE	2	3	GREEN/WHITE	3	6	GREEN	6	4	BLUE	4	5	BLUE/WHITE	5	7	BROWN/WHITE	7	8	BROWN	8	D																																													
CN1	WIRE COLOR	CN2																																																																															
1	ORANGE/WHITE	1																																																																															
2	ORANGE	2																																																																															
3	GREEN/WHITE	3																																																																															
6	GREEN	6																																																																															
4	BLUE	4																																																																															
5	BLUE/WHITE	5																																																																															
7	BROWN/WHITE	7																																																																															
8	BROWN	8																																																																															
E	<table><tr><th>① Length</th><th>Feet</th><th>mm</th><th>tolerance (mm)</th><th>③</th></tr><tr><td>001</td><td>1</td><td>305</td><td>+30.5/-15.3</td><td></td></tr><tr><td>003</td><td>3</td><td>914</td><td>+45.8/-36.6</td><td></td></tr><tr><td>005</td><td>5</td><td>1524</td><td>±45.8</td><td></td></tr><tr><td>007</td><td>7</td><td>2134</td><td>±64.1</td><td></td></tr><tr><td>010</td><td>10</td><td>3048</td><td>±91.5</td><td></td></tr><tr><td>015</td><td>15</td><td>4572</td><td>±137.3</td><td></td></tr><tr><td>020</td><td>20</td><td>6096</td><td>±183</td><td></td></tr><tr><td>025</td><td>25</td><td>7620</td><td>±228.8</td><td></td></tr><tr><td>050</td><td>50</td><td>15240</td><td>±457.5</td><td></td></tr><tr><td>100</td><td>100</td><td>30480</td><td>±915</td><td></td></tr></table>								① Length	Feet	mm	tolerance (mm)	③	001	1	305	+30.5/-15.3		003	3	914	+45.8/-36.6		005	5	1524	±45.8		007	7	2134	±64.1		010	10	3048	±91.5		015	15	4572	±137.3		020	20	6096	±183		025	25	7620	±228.8		050	50	15240	±457.5		100	100	30480	±915		E																	
① Length	Feet	mm	tolerance (mm)	③																																																																													
001	1	305	+30.5/-15.3																																																																														
003	3	914	+45.8/-36.6																																																																														
005	5	1524	±45.8																																																																														
007	7	2134	±64.1																																																																														
010	10	3048	±91.5																																																																														
015	15	4572	±137.3																																																																														
020	20	6096	±183																																																																														
025	25	7620	±228.8																																																																														
050	50	15240	±457.5																																																																														
100	100	30480	±915																																																																														
F	Electrical Open/short/intermittence:100% Dielectric strength: 2.5KV DC-2seconds. The operating temperature: -20°C~+60°C <table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td colspan="2">NAME.</td><td>Q'TY</td><td>SPECIFICATION</td></tr></table>								④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.		Q'TY	SPECIFICATION	F																																																				
④		Molding PVC	2	Molding PVC 65P																																																																													
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																																																																													
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																																																																													
NO.	NAME.		Q'TY	SPECIFICATION																																																																													
G	RoHS compliant Unit: mm <table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Customer-No.</th></tr><tr><td>TOLERANCE</td><td></td><td>④</td><td>Change the plant</td><td>12.04.2022</td><td>Luca</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td></tr><tr><td>X.</td><td>±X</td><td>③</td><td>Add tolerance for cable length</td><td>20.09.2019</td><td>Amy</td><td>Approved</td><td>12.04.2022</td><td>Luca</td></tr><tr><td>X.X</td><td></td><td>②</td><td>Add new length version</td><td>06.04.2017</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td></td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.°</td><td></td><td>①</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td></tr></table>								Scale	Free					Date	Name	Customer-No.	TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna	X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca	X.X		②	Add new length version	06.04.2017	Amy				X.XX		①	Update length version	07.12.2016	Amy				DIM	TOL	①	Update length version	07.12.2016	Amy				X.°		①	Drawn	24.06.2014	Joanna				Angle	TOL	Id.	Modification	Date	Name				G
Scale	Free					Date	Name	Customer-No.																																																																									
TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna																																																																									
X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca																																																																									
X.X		②	Add new length version	06.04.2017	Amy																																																																												
X.XX		①	Update length version	07.12.2016	Amy																																																																												
DIM	TOL	①	Update length version	07.12.2016	Amy																																																																												
X.°		①	Drawn	24.06.2014	Joanna																																																																												
Angle	TOL	Id.	Modification	Date	Name																																																																												
H	ASSMANN WSW components ASSMANN WSW-No. DK-1511-XXX/XX Drawing-No. ASS 7160 CA rev04 Replace SHEET								H																																																																								
	1	2	3	4	5	6	7																																																																										



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-003/B MODULAR CABLE

CHANGE NOTIFICATION:	PCN 20220425_DK-1511-003/B
DESCRIPTION OF CHANGES:	CHANGE OF DATA SHEET CHANGE OF DATA SHEET New Draw.-No. ASS_7160_CArev04
REASON FOR CHANGE:	CHANGE OF PRODUCT LOCATION CHANGE OF PRODUCT LOCATION
KEY CHARACTERISTICS OF CHANGE:	Details see page 3
PRODUCTS AFFECTED:	DK-1511-003/B
DATE OF CHANGE AND IMPLEMENTATION:	CHANGE: WEEK 18 / YEAR 2022 IMPLEMENTATION: 25/4/2022
RESPONSE:	NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PCN REVISION HISTORY:

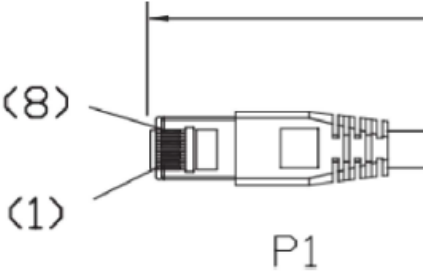
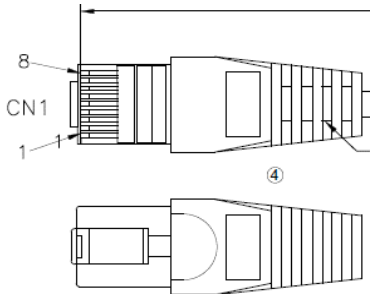
DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

page 1/

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-003/B	OLD VERSION	DK-1511-003/B	NEW VERSION																				
Apprearence		Apprearence																					
BOM	SPECIFICATIONS: 1. CONDUCTOR: 1.1 CONDUCTORS: 24AWG 7*0.19 ± 0.015mm 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN. 2. CABLE JACKET 2.1 PRINTING ON THE JACKET: CM (UL) C(UL) 4P 24AWG UTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3. CABLE ASSEMBLY 3.1 SEE SECTION A-A FOR DIMENSIONS 3.2 CABLE TIE: WHITE TIE 3.3 WIRING: T568B COLOR 3.4 CONTACT PLUG: RJ45 8P8C 3u pc UL 94V-2 4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST	BOM	<table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
④		Molding PVC	2	Molding PVC 65P																			
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

	1	2	3	4	5	6	7																																																																																	
A								A																																																																																
B								B																																																																																
C	Order code: DK-1511-XXX/XX color: BL(black),WH(white),B(blue),G(grey) Length: see table ①							C																																																																																
D	PIN OUT <table><tr><th>CN1</th><th>WIRE COLOR</th><th>CN2</th></tr><tr><td>1</td><td>ORANGE/WHITE</td><td>1</td></tr><tr><td>2</td><td>ORANGE</td><td>2</td></tr><tr><td>3</td><td>GREEN/WHITE</td><td>3</td></tr><tr><td>6</td><td>GREEN</td><td>6</td></tr><tr><td>4</td><td>BLUE</td><td>4</td></tr><tr><td>5</td><td>BLUE/WHITE</td><td>5</td></tr><tr><td>7</td><td>BROWN/WHITE</td><td>7</td></tr><tr><td>8</td><td>BROWN</td><td>8</td></tr></table>							CN1	WIRE COLOR	CN2	1	ORANGE/WHITE	1	2	ORANGE	2	3	GREEN/WHITE	3	6	GREEN	6	4	BLUE	4	5	BLUE/WHITE	5	7	BROWN/WHITE	7	8	BROWN	8	D																																																					
CN1	WIRE COLOR	CN2																																																																																						
1	ORANGE/WHITE	1																																																																																						
2	ORANGE	2																																																																																						
3	GREEN/WHITE	3																																																																																						
6	GREEN	6																																																																																						
4	BLUE	4																																																																																						
5	BLUE/WHITE	5																																																																																						
7	BROWN/WHITE	7																																																																																						
8	BROWN	8																																																																																						
E	<table><tr><th>① Length</th><th>Feet</th><th>mm</th><th>tolerance (mm)</th><th>③</th></tr><tr><td>001</td><td>1</td><td>305</td><td>+30.5/-15.3</td><td></td></tr><tr><td>003</td><td>3</td><td>914</td><td>+45.8/-36.6</td><td></td></tr><tr><td>005</td><td>5</td><td>1524</td><td>±45.8</td><td></td></tr><tr><td>007</td><td>7</td><td>2134</td><td>±64.1</td><td></td></tr><tr><td>010</td><td>10</td><td>3048</td><td>±91.5</td><td></td></tr><tr><td>015</td><td>15</td><td>4572</td><td>±137.3</td><td></td></tr><tr><td>020</td><td>20</td><td>6096</td><td>±183</td><td></td></tr><tr><td>025</td><td>25</td><td>7620</td><td>±228.8</td><td></td></tr><tr><td>050</td><td>50</td><td>15240</td><td>±457.5</td><td></td></tr><tr><td>100</td><td>100</td><td>30480</td><td>±915</td><td></td></tr></table>							① Length	Feet	mm	tolerance (mm)	③	001	1	305	+30.5/-15.3		003	3	914	+45.8/-36.6		005	5	1524	±45.8		007	7	2134	±64.1		010	10	3048	±91.5		015	15	4572	±137.3		020	20	6096	±183		025	25	7620	±228.8		050	50	15240	±457.5		100	100	30480	±915		E																									
① Length	Feet	mm	tolerance (mm)	③																																																																																				
001	1	305	+30.5/-15.3																																																																																					
003	3	914	+45.8/-36.6																																																																																					
005	5	1524	±45.8																																																																																					
007	7	2134	±64.1																																																																																					
010	10	3048	±91.5																																																																																					
015	15	4572	±137.3																																																																																					
020	20	6096	±183																																																																																					
025	25	7620	±228.8																																																																																					
050	50	15240	±457.5																																																																																					
100	100	30480	±915																																																																																					
F	Electrical Open/short/intermittence:100% Dielectric strength: 2.5KV DC-2seconds. The operating temperature: -20°C~+60°C <table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td colspan="2">NAME.</td><td>Q'TY</td><td>SPECIFICATION</td></tr></table>							④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.		Q'TY	SPECIFICATION	F																																																												
④		Molding PVC	2	Molding PVC 65P																																																																																				
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																																																																																				
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																																																																																				
NO.	NAME.		Q'TY	SPECIFICATION																																																																																				
G	RoHS compliant Unit: mm <table><tr><th>Scale</th><th>Free</th><td>④</td><td>Change the plant</td><td>12.04.2022</td><td>Luca</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td>Customer-No.</td></tr><tr><td colspan="2">TOLERANCE</td><td>④</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.</td><td>±X</td><td>③</td><td>Add tolerance for cable length</td><td>20.09.2019</td><td>Amy</td><td>Approved</td><td>12.04.2022</td><td>Luca</td><td>ASSMANN WSW-No.</td></tr><tr><td>X.X</td><td></td><td>②</td><td>Add new length version</td><td>06.04.2017</td><td>Amy</td><td></td><td></td><td></td><td>DK-1511-XXX/XX</td></tr><tr><td>X.XX</td><td></td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td></td><td></td><td></td><td></td><td></td><td></td><td>ASS 7160 CA</td></tr><tr><td>X.°</td><td></td><td>①</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td></td><td></td><td></td><td>rev04</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2"></td><td>Replace</td><td>SHEET</td></tr></table>							Scale	Free	④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna	Customer-No.	TOLERANCE		④								X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca	ASSMANN WSW-No.	X.X		②	Add new length version	06.04.2017	Amy				DK-1511-XXX/XX	X.XX		①	Update length version	07.12.2016	Amy				Drawing-No.	DIM	TOL	①							ASS 7160 CA	X.°		①	Drawn	24.06.2014	Joanna				rev04	Angle	TOL	Id.	Modification	Date	Name			Replace	SHEET	G
Scale	Free	④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna	Customer-No.																																																																															
TOLERANCE		④																																																																																						
X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca	ASSMANN WSW-No.																																																																															
X.X		②	Add new length version	06.04.2017	Amy				DK-1511-XXX/XX																																																																															
X.XX		①	Update length version	07.12.2016	Amy				Drawing-No.																																																																															
DIM	TOL	①							ASS 7160 CA																																																																															
X.°		①	Drawn	24.06.2014	Joanna				rev04																																																																															
Angle	TOL	Id.	Modification	Date	Name			Replace	SHEET																																																																															
H								H																																																																																
	1	2	3	4	5	6	7																																																																																	



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-001/BL MODULAR CABLE

CHANGE NOTIFICATION:

PCN 20220425_DK-1511-001/BL

DESCRIPTION OF CHANGES:

CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7160_CArev04

REASON FOR CHANGE:

CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE:

Details see page 3

PRODUCTS AFFECTED:

DK-1511-001/BL

DATE OF CHANGE AND IMPLEMENTATION:

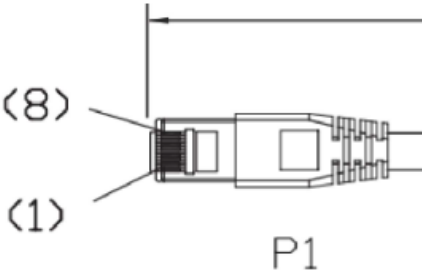
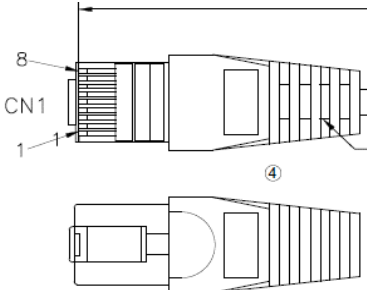
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE:

NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-001/BL	OLD VERSION	DK-1511-001/BL	NEW VERSION																				
Apprearence		Apprearence																					
BOM	SPECIFICATIONS: 1. CONDUCTOR: 1.1 CONDUCTORS: 24AWG 7*0.19 ± 0.015mm 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN. 2. CABLE JACKET 2.1 PRINTING ON THE JACKET: CM (UL) C(UL) 4P 24AWG UTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3. CABLE ASSEMBLY 3.1 SEE SECTION A-A FOR DIMENSIONS 3.2 CABLE TIE: WHITE TIE 3.3 WIRING: T568B COLOR 3.4 CONTACT PLUG: RJ45 8P8C 3u pc UL 94V-2 4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST	BOM	<table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
④		Molding PVC	2	Molding PVC 65P																			
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

PCN REVISION HISTORY:

DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

page 3/

	1	2	3	4	5	6	7																																																																																		
A								A																																																																																	
B								B																																																																																	
C	Order code: DK-1511-XXX/XX color: BL(black),WH(white),B(blue),G(grey) Length: see table ①							C																																																																																	
D	PIN OUT CN1 WIRE COLOR CN2							D																																																																																	
E	<table><tr><th>① Length</th><th>Feet</th><th>mm</th><th>tolerance (mm)</th><th>③</th></tr><tr><td>001</td><td>1</td><td>305</td><td>+30.5/-15.3</td><td></td></tr><tr><td>003</td><td>3</td><td>914</td><td>+45.8/-36.6</td><td></td></tr><tr><td>005</td><td>5</td><td>1524</td><td>±45.8</td><td></td></tr><tr><td>007</td><td>7</td><td>2134</td><td>±64.1</td><td></td></tr><tr><td>010</td><td>10</td><td>3048</td><td>±91.5</td><td></td></tr><tr><td>015</td><td>15</td><td>4572</td><td>±137.3</td><td></td></tr><tr><td>020</td><td>20</td><td>6096</td><td>±183</td><td></td></tr><tr><td>025</td><td>25</td><td>7620</td><td>±228.8</td><td></td></tr><tr><td>050</td><td>50</td><td>15240</td><td>±457.5</td><td></td></tr><tr><td>100</td><td>100</td><td>30480</td><td>±915</td><td></td></tr></table>							① Length	Feet	mm	tolerance (mm)	③	001	1	305	+30.5/-15.3		003	3	914	+45.8/-36.6		005	5	1524	±45.8		007	7	2134	±64.1		010	10	3048	±91.5		015	15	4572	±137.3		020	20	6096	±183		025	25	7620	±228.8		050	50	15240	±457.5		100	100	30480	±915		E																										
① Length	Feet	mm	tolerance (mm)	③																																																																																					
001	1	305	+30.5/-15.3																																																																																						
003	3	914	+45.8/-36.6																																																																																						
005	5	1524	±45.8																																																																																						
007	7	2134	±64.1																																																																																						
010	10	3048	±91.5																																																																																						
015	15	4572	±137.3																																																																																						
020	20	6096	±183																																																																																						
025	25	7620	±228.8																																																																																						
050	50	15240	±457.5																																																																																						
100	100	30480	±915																																																																																						
F	Electrical Open/short/intermittence:100% Dielectric strength: 2.5KV DC-2seconds. The operating temperature: -20°C~+60°C <table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>							④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION		F																																																													
④		Molding PVC	2	Molding PVC 65P																																																																																					
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																																																																																					
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																																																																																					
NO.	NAME.	Q'TY	SPECIFICATION																																																																																						
G	RoHS compliant Unit: mm <table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Customer-No.</th></tr><tr><td>TOLERANCE</td><td></td><td>④</td><td>Change the plant</td><td>12.04.2022</td><td>Luca</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td></tr><tr><td>X.</td><td>±X</td><td>③</td><td>Add tolerance for cable length</td><td>20.09.2019</td><td>Amy</td><td>Approved</td><td>12.04.2022</td><td>Luca</td></tr><tr><td>X.XX</td><td></td><td>②</td><td>Add new length version</td><td>06.04.2017</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td></td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.°</td><td></td><td>①</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td></tr></table> ASSMANN WSW-No. DK-1511-XXX/XX Drawing-No. ASS 7160 CA rev04 Replace SHEET							Scale	Free					Date	Name	Customer-No.	TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna	X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca	X.XX		②	Add new length version	06.04.2017	Amy				X.XX		①	Update length version	07.12.2016	Amy				DIM	TOL	①	Update length version	07.12.2016	Amy				X.°		①	Drawn	24.06.2014	Joanna						①	Drawn	24.06.2014	Joanna				Angle	TOL	Id.	Modification	Date	Name				G
Scale	Free					Date	Name	Customer-No.																																																																																	
TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna																																																																																	
X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca																																																																																	
X.XX		②	Add new length version	06.04.2017	Amy																																																																																				
X.XX		①	Update length version	07.12.2016	Amy																																																																																				
DIM	TOL	①	Update length version	07.12.2016	Amy																																																																																				
X.°		①	Drawn	24.06.2014	Joanna																																																																																				
		①	Drawn	24.06.2014	Joanna																																																																																				
Angle	TOL	Id.	Modification	Date	Name																																																																																				
H								H																																																																																	
	1	2	3	4	5	6	7																																																																																		



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-001/B MODULAR CABLE

CHANGE NOTIFICATION:	PCN 20220425_DK-1511-001/B
DESCRIPTION OF CHANGES:	CHANGE OF DATA SHEET CHANGE OF DATA SHEET New Draw.-No. ASS_7160_CArev04
REASON FOR CHANGE:	CHANGE OF PRODUCT LOCATION CHANGE OF PRODUCT LOCATION
KEY CHARACTERISTICS OF CHANGE:	Details see page 3
PRODUCTS AFFECTED:	DK-1511-001/B
DATE OF CHANGE AND IMPLEMENTATION:	CHANGE: WEEK 18 / YEAR 2022 IMPLEMENTATION: 25/4/2022
RESPONSE:	NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PCN REVISION HISTORY:

DATE OF REVISION: 25/4/2022

REVISION NUMBER: 00

page 1/

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-001/B	OLD VERSION	DK-1511-001/B	NEW VERSION																				
Apprearence		Apprearence																					
BOM	SPECIFICATIONS: 1. CONDUCTOR: 1.1 CONDUCTORS: 24AWG 7*0.19 ± 0.015mm 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN. 2. CABLE JACKET 2.1 PRINTING ON THE JACKET: CM (UL) C(UL) 4P 24AWG UTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3. CABLE ASSEMBLY 3.1 SEE SECTION A-A FOR DIMENSIONS 3.2 CABLE TIE: WHITE TIE 3.3 WIRING: T568B COLOR 3.4 CONTACT PLUG: RJ45 8P8C 3u pc UL 94V-2 4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST	BOM	<table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
④		Molding PVC	2	Molding PVC 65P																			
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-025/G MODULAR CABLE

CHANGE NOTIFICATION:

PCN 20220425_DK-1511-025/G

DESCRIPTION OF CHANGES:

CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7160_CArev04

REASON FOR CHANGE:

CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE:

Details see page 3

PRODUCTS AFFECTED:

DK-1511-025/G

DATE OF CHANGE AND IMPLEMENTATION:

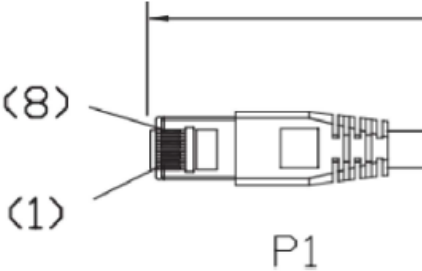
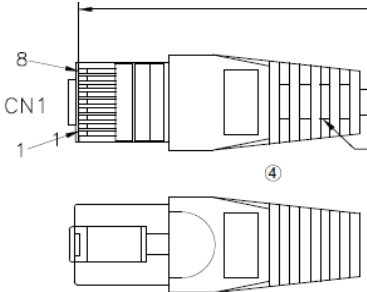
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE:

NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1511-025/G	OLD VERSION	DK-1511-025/G	NEW VERSION																				
Apprearence		Apprearence																					
BOM	SPECIFICATIONS: 1. CONDUCTOR: 1.1 CONDUCTORS: 24AWG 7*0.19 ± 0.015mm 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN. 2. CABLE JACKET 2.1 PRINTING ON THE JACKET: CM (UL) C(UL) 4P 24AWG UTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3. CABLE ASSEMBLY 3.1 SEE SECTION A-A FOR DIMENSIONS 3.2 CABLE TIE: WHITE TIE 3.3 WIRING T568B COLOR 3.4 CONTACT PLUG: RJ45 8P8C 3u pc UL 94V-2 4. CABLE JACKET COLOR: ACCORDING TO CUSTOMER'S REQUEST	BOM	<table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td>NAME.</td><td>Q'TY</td><td colspan="2">SPECIFICATION</td></tr></table>	④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
④		Molding PVC	2	Molding PVC 65P																			
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																			
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																			
NO.	NAME.	Q'TY	SPECIFICATION																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																							

	1	2	3	4	5	6	7																																																																										
A									A																																																																								
B									B																																																																								
C	Order code: DK-1511-XXX/XX color: BL(black),WH(white),B(blue),G(grey) Length: see table ①								C																																																																								
D	PIN OUT <table><tr><th>CN1</th><th>WIRE COLOR</th><th>CN2</th></tr><tr><td>1</td><td>ORANGE/WHITE</td><td>1</td></tr><tr><td>2</td><td>ORANGE</td><td>2</td></tr><tr><td>3</td><td>GREEN/WHITE</td><td>3</td></tr><tr><td>6</td><td>GREEN</td><td>6</td></tr><tr><td>4</td><td>BLUE</td><td>4</td></tr><tr><td>5</td><td>BLUE/WHITE</td><td>5</td></tr><tr><td>7</td><td>BROWN/WHITE</td><td>7</td></tr><tr><td>8</td><td>BROWN</td><td>8</td></tr></table>								CN1	WIRE COLOR	CN2	1	ORANGE/WHITE	1	2	ORANGE	2	3	GREEN/WHITE	3	6	GREEN	6	4	BLUE	4	5	BLUE/WHITE	5	7	BROWN/WHITE	7	8	BROWN	8	D																																													
CN1	WIRE COLOR	CN2																																																																															
1	ORANGE/WHITE	1																																																																															
2	ORANGE	2																																																																															
3	GREEN/WHITE	3																																																																															
6	GREEN	6																																																																															
4	BLUE	4																																																																															
5	BLUE/WHITE	5																																																																															
7	BROWN/WHITE	7																																																																															
8	BROWN	8																																																																															
E	<table><tr><th>① Length</th><th>Feet</th><th>mm</th><th>tolerance (mm)</th><th>③</th></tr><tr><td>001</td><td>1</td><td>305</td><td>+30.5/-15.3</td><td></td></tr><tr><td>003</td><td>3</td><td>914</td><td>+45.8/-36.6</td><td></td></tr><tr><td>005</td><td>5</td><td>1524</td><td>±45.8</td><td></td></tr><tr><td>007</td><td>7</td><td>2134</td><td>±64.1</td><td></td></tr><tr><td>010</td><td>10</td><td>3048</td><td>±91.5</td><td></td></tr><tr><td>015</td><td>15</td><td>4572</td><td>±137.3</td><td></td></tr><tr><td>020</td><td>20</td><td>6096</td><td>±183</td><td></td></tr><tr><td>025</td><td>25</td><td>7620</td><td>±228.8</td><td></td></tr><tr><td>050</td><td>50</td><td>15240</td><td>±457.5</td><td></td></tr><tr><td>100</td><td>100</td><td>30480</td><td>±915</td><td></td></tr></table>								① Length	Feet	mm	tolerance (mm)	③	001	1	305	+30.5/-15.3		003	3	914	+45.8/-36.6		005	5	1524	±45.8		007	7	2134	±64.1		010	10	3048	±91.5		015	15	4572	±137.3		020	20	6096	±183		025	25	7620	±228.8		050	50	15240	±457.5		100	100	30480	±915		E																	
① Length	Feet	mm	tolerance (mm)	③																																																																													
001	1	305	+30.5/-15.3																																																																														
003	3	914	+45.8/-36.6																																																																														
005	5	1524	±45.8																																																																														
007	7	2134	±64.1																																																																														
010	10	3048	±91.5																																																																														
015	15	4572	±137.3																																																																														
020	20	6096	±183																																																																														
025	25	7620	±228.8																																																																														
050	50	15240	±457.5																																																																														
100	100	30480	±915																																																																														
F	Electrical Open/short/intermittence:100% Dielectric strength: 2.5KV DC-2seconds. The operating temperature: -20°C~+60°C <table><tr><td>④</td><td></td><td>Molding PVC</td><td>2</td><td>Molding PVC 65P</td></tr><tr><td>④</td><td></td><td>RJ45 CONN</td><td>2</td><td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td></tr><tr><td>④</td><td></td><td>CABLE</td><td>1</td><td>CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm</td></tr><tr><td>NO.</td><td colspan="2">NAME.</td><td>Q'TY</td><td>SPECIFICATION</td></tr></table>								④		Molding PVC	2	Molding PVC 65P	④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm	NO.	NAME.		Q'TY	SPECIFICATION	F																																																				
④		Molding PVC	2	Molding PVC 65P																																																																													
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																																																																													
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm																																																																													
NO.	NAME.		Q'TY	SPECIFICATION																																																																													
G	RoHS compliant Unit: mm <table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Customer-No.</th></tr><tr><td>TOLERANCE</td><td></td><td>④</td><td>Change the plant</td><td>12.04.2022</td><td>Luca</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td></tr><tr><td>X.</td><td>±X</td><td>③</td><td>Add tolerance for cable length</td><td>20.09.2019</td><td>Amy</td><td>Approved</td><td>12.04.2022</td><td>Luca</td></tr><tr><td>X.X</td><td></td><td>②</td><td>Add new length version</td><td>06.04.2017</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td></td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Update length version</td><td>07.12.2016</td><td>Amy</td><td></td><td></td><td></td></tr><tr><td>X.°</td><td></td><td>①</td><td>Drawn</td><td>24.06.2014</td><td>Joanna</td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td></tr></table>								Scale	Free					Date	Name	Customer-No.	TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna	X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca	X.X		②	Add new length version	06.04.2017	Amy				X.XX		①	Update length version	07.12.2016	Amy				DIM	TOL	①	Update length version	07.12.2016	Amy				X.°		①	Drawn	24.06.2014	Joanna				Angle	TOL	Id.	Modification	Date	Name				G
Scale	Free					Date	Name	Customer-No.																																																																									
TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna																																																																									
X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022	Luca																																																																									
X.X		②	Add new length version	06.04.2017	Amy																																																																												
X.XX		①	Update length version	07.12.2016	Amy																																																																												
DIM	TOL	①	Update length version	07.12.2016	Amy																																																																												
X.°		①	Drawn	24.06.2014	Joanna																																																																												
Angle	TOL	Id.	Modification	Date	Name																																																																												
H	ASSMANN WSW components ASSMANN WSW-No. DK-1511-XXX/XX Drawing-No. ASS 7160 CA rev04 Replace SHEET								H																																																																								
	1	2	3	4	5	6	7																																																																										